

EHO

Electromagnetic Hold-Open

This Electromagnetic Hold-Open device (EHO) allows for barrier-free access at single and double leaf fire doors. Doors will be held open under normal circumstances to ensure free flow of traffic, yet close securely in case of a fire or power failure.




Certificate
2812-CPR-AE5020



Product Features

	24V	48V
Hold-open angle	80°-140°	80°-140°
Adjustable release force	25Nm-78Nm	25Nm-78Nm
Operating voltage	24 VDC ± 15%	48 VDC ± 15%
Power input	1.4W	1.4W
Rated for continuous duty	100% ED	100% ED
EN 1155	V	
D.A.S. NF S 61-937-1	V	V

Options

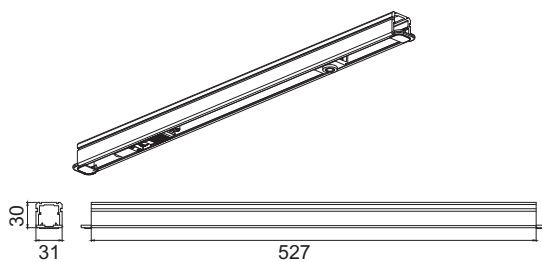

ZHT96-D002

- Electromagnetic Hold-Open device (EHO)
- With track arm: ZAA-D145 and rail: ZHAA-D002
- EN Certified

Installation

Concealed mount T96M EN3-6 (T96G EN2-4)

